

Basic PAPR Belt Unit

CleanAIR®



Complies to:
AS/NZS 1716:2012

Features & Benefits

- Lightweight and compact
- Exchangeable Li-Ion battery
- Adjustable airflow in five levels (170–240lpm)
- Flow Control system maintains constant airflow regardless of the level of filter clogging or battery charge
- Audiovisual alarm
- Indication of filter clogging and battery charge
- Newly designed LED control panel
- Simple one-button operation
- New click-lock system for easy attaching the filter cover

Applications

- Welding, grinding and surface finishing operations
- Automotive and shipbuilding industry
- Agriculture, food processing industry
- Building and construction, wood working

Product Details

Product Code: R810000PA
Weight: 880g (including standard battery)
Dimensions: 191x173x104mm
Airflow: 170 and 240lpm
Alarm: Audio, visual & vibrating
Operation* / charging time: < 10 / < 5 h
Battery: Li-Ion 7,2 V / 5,2 Ah

Standards

Certified to AS/NZS 1716:2012 for Respiratory protective devices
EN 12941 TH3


Exploded View



Optional back harness available to increase back support and comfort

Comfort Padded Harness
R520044.1

Decontaminable Harness
R510042

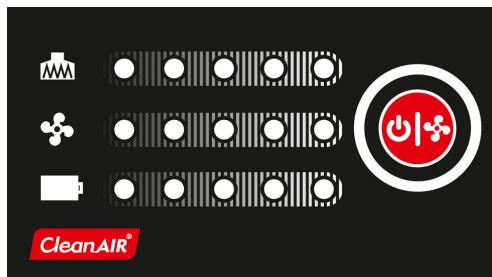


LED Control Panel

- Filter Clogging Alarm
- Fan Speed Indicator
- Battery Level Indicator with audio/visual alarm

Filters Available

The CleanAIR Basic is equipped with a highly efficient P3 particle filter that protects the user against solid and liquid aerosols. The pre-filter increases the lifetime of the main P3 filter. An odour filter is also available to reduce unpleasant odours.

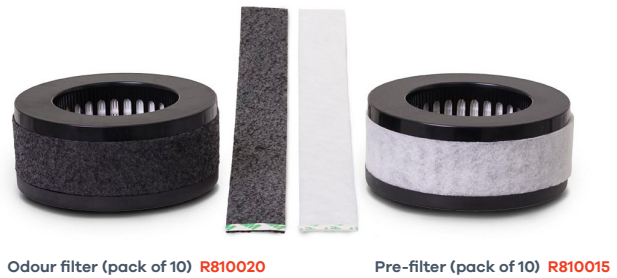

Available Head Top Combinations



[CLICK HERE FOR PRODUCT SPEC](#)

there's safe and there's Maxisafe.